



## PRODUCT DESCRIPTION

Uragard MT F is a three component, flexible, self-smoothing and hard-wearing polyurethane resin floor screed. Uragard MT F can be supplied with an optional broadcast finish to create an anti-slip profile or as the standard smooth, semi-gloss finish.

Uragard MT F is ideal for use over structurally smooth suspended wood or steel mezzanine substrates and substrates susceptible to flexing movement.

## KEY BENEFITS

- Flexible and tough once cured
- Abrasion resistant
- Solvent free and non-taint
- Quick curing
- Chemical and temperature resistant
- Seamless and hygienic
- Optional biocide additive and anti-slip finish

## TECHNICAL DATA

John L. Lord & Son Ltd is an ISO 9001:2008 accredited company and all products are manufactured strictly to ISO quality standards.

## Physical Properties

Complies with BS 8204-6 / FeRFA Type 7, System Make-Up:

Primer(s):	1 coat Epigard Fastrac Primer or Uragard Primer F
System:	1 application of Uragard MT F scratchcoat and 1 coat of Uragard MT F basecoat
Sealer Coat(s):	None as standard
Optional Variations:	Biocide additive, anti-slip finish, clear scratch resistant sealer

System Details:

Finish:	Solid colour, satin, smooth or anti-slip finish
Thickness:	3 mm to 5 mm

## Chemical Resistance

Highly resistant to a wide range of chemicals including organic solvents, acids and alkalis. For full details consult the John Lord Technical Dept.

Note: Discolouration or staining may occur when exposed to some chemicals based on the nature of the spill and cleaning regime followed.

## BioCote® additive

John Lord has partnered with BioCote® to provide an optional antimicrobial additive to our flooring systems. This additive provides continuous protection against bacteria, mould, and mildew. For further information contact your John Lord representative.

## Performance Data

System Density	1.5 g/cm <sup>3</sup>
Elongation at break:	40 %
Tensile Strength:	10 N/mm <sup>2</sup>
Bond Strength to Concrete:	> 2.5 N/mm <sup>2</sup>
Temperature Resistance:	Constant up to 60°C at 3 mm, 80°C at 5 mm.
Abrasion Resistance:	BS8204-2 Class AR1:< 0.1 mm
Water Permeability:	Nil

Uragard MT F is classified as Low Slip Potential Flooring (dry) as described in 'The Assessment of Floor Slip Resistance: The UKSG Guidelines issue 4 / 2011'. Results were obtained from tests carried out by the Health and Safety Laboratory (HSL) and from our own internal laboratory tests.

All figures are measured and expressed under laboratory conditions. Actual performance may vary from the above values depending upon site conditions.

## Curing Time

A completed resin floor can go into service after the following minimum cure periods at 16°C and above:

Light Traffic:	24 hours
Heavy Traffic:	72 hours
Full Chemical Cure:	7 days

## SHELF LIFE AND STORAGE

The product should be kept in its original unopened container until use. The product should be stored in weather tight conditions at temperatures between 10°C and 25°C, avoiding direct sunlight. Under these conditions this product has a shelf life of up to 6 months.

## CE MARKING




EN 13813 AR1-B2.8-IR4.0

Synthetic resin screed material for use internally in buildings


Bond Strength:	B 2.8
Wear Resistance:	AR1
Impact Resistance:	IR 4.0

## STANDARD COLOUR RANGE

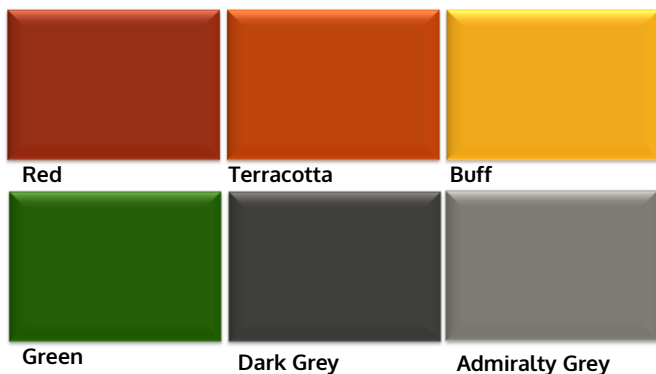

*These colours are an indication only. Please request samples for accurate colour tiles.*

## Optional Colour Range

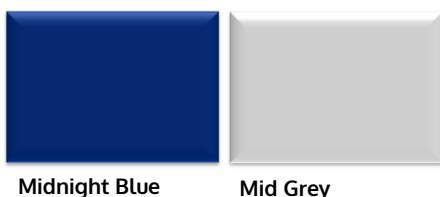

*Blue uses organic pigments which have instability under differing shear rates and atmospheric conditions. This can lead to increased variance between mixes. Blue Epigard Epiflex is a lighter shade than the screed due to manufacturing constraints. Due to their inherent chemical composition, all polyurethanes discolour over time. However, this discolouration is more prominent with Blue and Mid Grey. Please contact your John Lord representative for more information.*

## APPLICATION INFORMATION

John Lord recommends that all products are installed by their own Contracts Department who provide a professional service with experienced Project Management supervision and skilled, trained and NVQ/CSCS approved employees.

### Suitable Applications

- Suspended Substrates with Flexing Movement
- Laboratories & Clean Rooms
- Warehousing & Storage
- Dry Processing, Assembly, & Packing
- Pharmaceutical Production
- Workshops & Plant Rooms

### Application Temperature

Air and substrate temperatures should be maintained between 16°C and 23°C during the application and curing period of this product. Materials should also be kept in a warm area of 16°C minimum temperature for 12 hours prior to application. Dehumidifiers must be used where high humidity conditions prevail. Ensure adequate ventilation during application.

## Priming

The dry, prepared, dust-free substrate should receive a roller or squeegee coat of Uragard Primer F, or Epigard Fastrac primer on semi-cured, new, or damp concrete. After cure, the Uragard MT F scratch-coat can be applied.

## System Application

The Uragard MT F bodycoat should be mixed and squeegee applied at a thickness of between 2 and 4 mm with spike roll finish.

## Joints

All known expansion joints should be followed through the resin floor finish using Epiflex Jointing Mastic. If concrete movement or cracking takes place after application, then reflective cracking of the topping may occur.

**Note:** The texture of Uragard MT F on the finished floor surface may appear banded or slightly variable. This is a natural, visual aspect of the system influenced by atmospheric conditions and is not defective in anyway. Polyurethane systems have limited colour stability which can result in discoloration of the floor over a period of time or upon exposure to UV light. Our standard colour range has been carefully chosen to provide a colour range limiting the extent of discolouration.

## IN-SERVICE MAINTENANCE

Good housekeeping and regular cleaning can considerably extend the service life of a resin screed floor and will enhance the floor's appearance and reduce soiling tendencies.

Suitable cleaning methods for this product include:

- Rotary scrubbing machine or hot water washing (up to 80°C) with suitable detergent products. See John Lord Cleaning Guide for further details.
- Flash steam clean is not suitable.

## STATEMENT OF RESPONSIBILITY

The information within this John Lord Technical Data Sheet is provided as an introduction to the system only and may vary according to on-site or environmental conditions. As the information provided is of a general nature, no guarantee is implied, and it is the responsibility of the client or user to discuss in detail with John Lord the suitability of the product for a particular application. John Lord cannot accept any responsibility for work and the subsequent performance of their systems that are not controlled by their own contracting services. John Lord reserve the right to alter information in this document without prior notification; it is the responsibility of the client or user to obtain the most recent issue.